

CONNECTION RODS



Functions

Connection rod for the operating mechanism.

Online data sheet



Technical Features


Specially made to be machined, as in the figure, by the semiautomatic machines PM008 and PA009 and by the automatic machines GS003, GS008, GS009 and TF10.

Roll packing makes for considerable reductions in overall dimensions, since a roll of diameter 90 cm contains the equivalent of over 40 bars of 6 m of aluminium.

The rod extension element enables fitting the incorrect movement safety striker and the fastening striker on the central upright on casements with two sashes where the bolt is located.

Materials

Fibreglass-reinforced polyamide

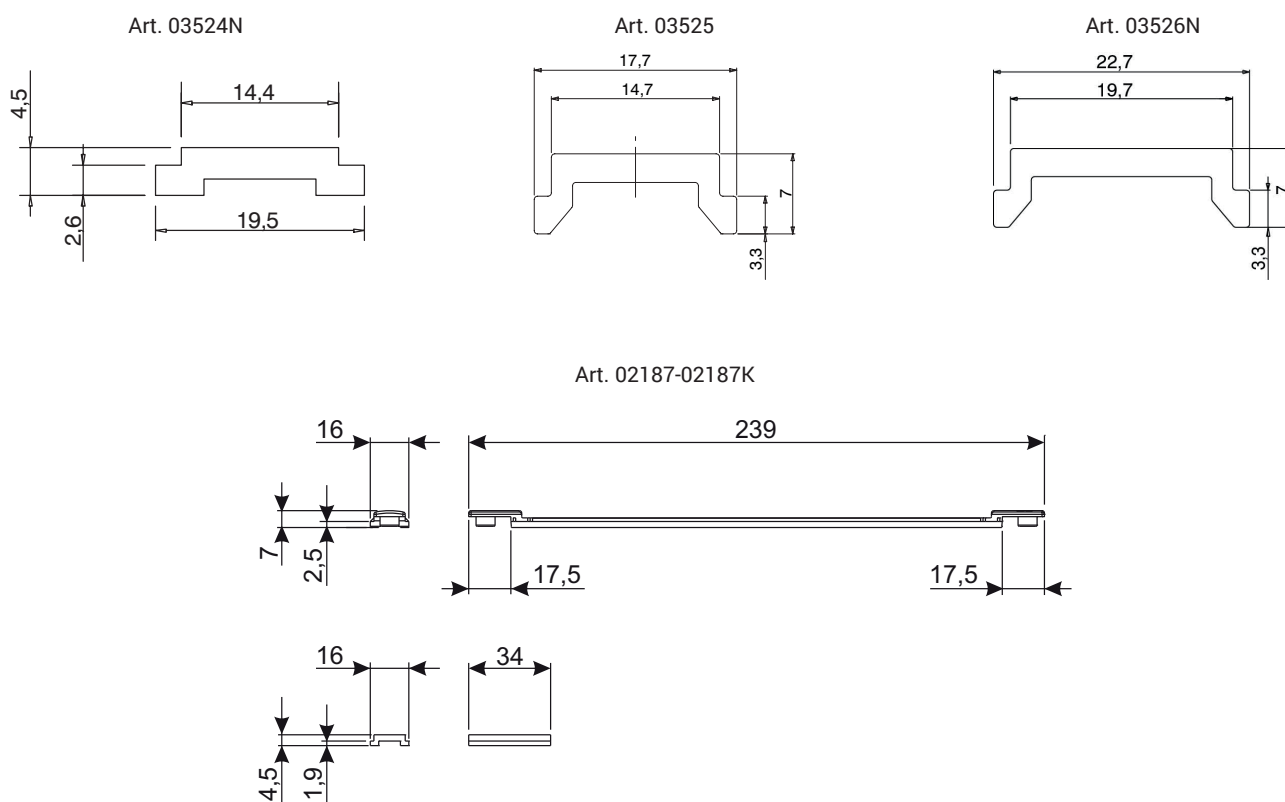

Item code	Description	PROFILE CROSS - SECTION	Groove (mm)	Colour	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
01216	ROD EXTENSION COMPONENT	-	15 ÷ 18	Grey	X				20
02187	ROD EXTENSION COMPONENT	C001-C002-C003-C004-C005-C006-C007-C008-C009-C010-C012-C013-C014-C015-C016-C017	15 ÷ 20	Black	X				20
02187K	ROD EXTENSION COMPONENT	C001-C002-C003-C005-C010-C011-C012-C013-C014-C015-C016-C017	15 ÷ 20	Grey	X				20
03524N	CONNECTION ROD	C001-C013-C016-C017-P002	15 ÷ 20	-	X				1
03525	CONNECTION ROD	C007	15 ÷ 18	-	X				1
03526N	CONNECTION ROD	C008	20 ÷ 23	-	X				1